


## FLAT BEAM

| PART NUMBER | X (IN) | Y (MM) |
|-------------|--------|--------|
| REV-41-1698 | 1.57   | 40.0   |
| REV-41-1697 | 2.83   | 72.0   |
| REV-41-1696 | 4.09   | 104.0  |
| REV-41-1695 | 5.98   | 152.0  |
| REV-41-1694 | 8.50   | 216.0  |
| REV-41-1693 | 12.28  | 312.0  |
| REV-41-1692 | 16.06  | 408.0  |
| REV-41-1691 | 19.84  | 504.0  |

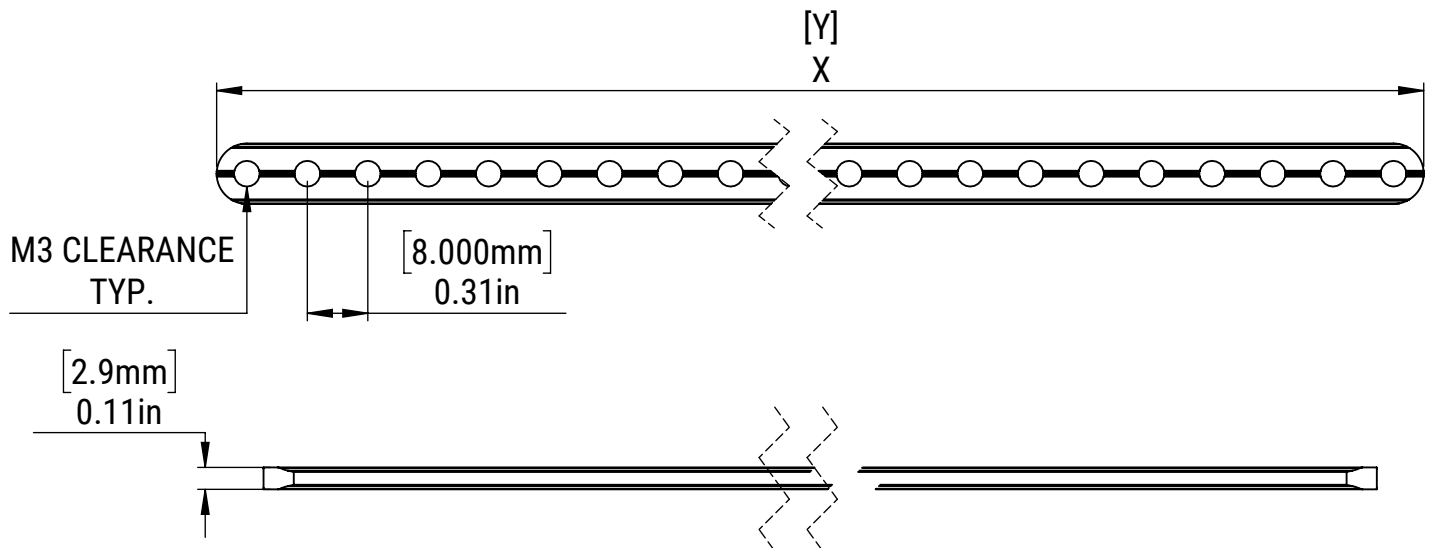

MM SHEET TOLERANCES:  
 $X \pm 0.50\text{ MM}$   
 $X.X \pm 0.10\text{ MM}$   
 $X.XX \pm 0.05\text{ MM}$   
 ANGLES  $\pm 2^\circ$

INCH SHEET TOLERANCES:  
 $X \pm 0.1\text{ IN}$   
 $X.X \pm 0.02\text{ IN}$   
 $X.XX \pm 0.004\text{ IN}$   
 $X.XXX \pm 0.002\text{ IN}$   
 ANGLES  $\pm 2^\circ$

MATERIAL:  
**6063 Aluminum**

DATE: 7/31/2020